

RDS-411

Rugged Docking Station for RTC-1010

v0.4




Features

- Apply on RTC-1010
- Front-facing I/Os: USB x 2 with Protection Cover
- Downward-facing I/Os for Easy Cable Management:
USB 2.0 x 2, RS-232 x 2 (One: Optional), RJ45 GbE x 1,
DC-in Phoenix Connector x 1
- Wide Voltage Input: 9VDC ~ 36VDC
- Power Adaptor: AC Power Adaptor (Default)
- Anti-theft Lock with Key & VESA Mount

Specifications

System	
I/O	Front-facing I/Os: USB 2.0 x 2 with protection cover Downward-facing I/Os: USB 2.0 x 2 RS-232 x 2 (One: Optional) RJ45 GbE x 1
DC Input	Phoenix connector: DINKLE ECH381H-03P Wide Voltage Input: DC 9V to 36V Mating connector: DINKLE EC381V-03P
LED Indicator	Orange: DC in w/o Tablet Blue: DC in w/ Tablet
Others	Anti-theft lock with key & VESA mount
Mechanical	
Color	Black
Construction	PC
Dimension (W x H x D)	256 x 185 x 75 mm (10.08" x 7.28" x 2.96")
Gross Weight	2.8 Kg (6.17 lb)
Environmental	
Operating Temperature	0°C ~ 50°C (32°F ~ 122°F)
Storage Temperature	-10°C ~ 60°C (14°F ~ 140°F)
ESD	Air charge: +/- 8KV Contact charge: +/- 4KV
Certifications and Standards	CE/FCC Class B/UL
Power Supply	
AC Adapter	AC 100 ~ 240 V, 50 ~ 60 Hz, Output: 12V/ 3.34A/ 40W DC connector: DINKLE EC381V-03P
DC Adapter	N/A

Dimension Unit: mm

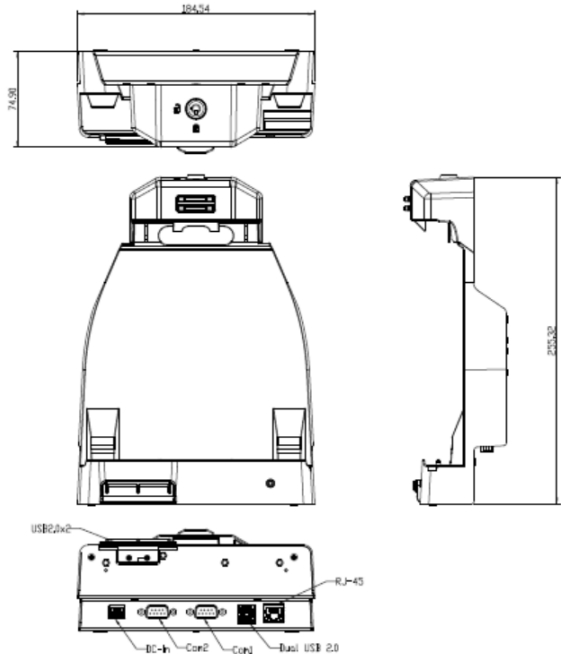

Packing List

RDS-411
12V / 40W AC Power Adaptor

Ordering Information

RDS-411-000

Docking Station.USBx4.RS-232x1.RJ45x1.DC Connector.9-36V Input

RDS-411-001

Docking Station.USBx4.RS-232x1.RJ45x1.DC Connector.9-36V Input.W/
Stand

Optional Accessories

DC Input Cable, P/N: TBD

2 Meters.One Side With Mating Connector: DINKLE EC381V-03P.One
Side With Flying Wires